



The Soundraiser.



HDVA 600

 **SENNHEISER**

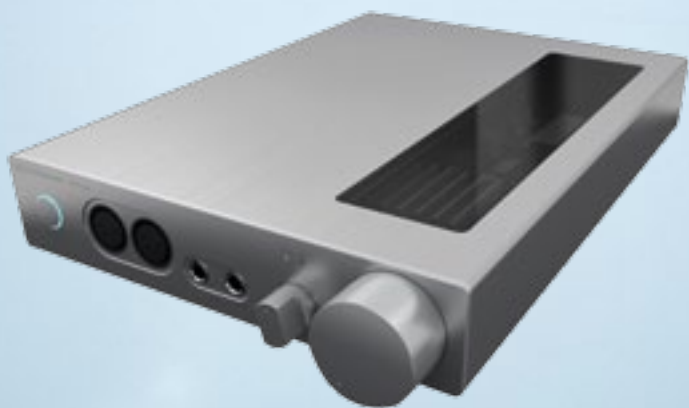

HDVA 600

This high-class amplifier for headphones features the latest wiring details, along with subassemblies selected meticulously by acousticians as having the lowest possible tolerances. Its strictly symmetrical wiring layout achieves distortion levels which are almost unmeasurably low. ‚The Soundraiser‘ plant receives signals via symmetrical XLR inputs and possesses symmetrical 4-pin front sockets for suitably configured headphones.

- Consistently symmetrical signal processing for maximum sound quality
- Symmetrical inputs and outputs simplify integration into a system
- High-end ALPS quadruple potentiometer achieve perfect channel equality
- Variable gain factor (five stages) for optimized use of low impedance headphones
- Sophisticated metal housing to protect against signal scatter and vibration
- Solid controls turned from solid metal, providing the utmost in long-term stability

Technical Data

HDVA 600

EAN	4044155079050
UPC	615104229693
Article. No.	505589
Power supply	
Input voltage:	100..240 V AC / 50..60 Hz
Power consumption:	< 30 VA
Audio inputs	
<i>Analogue input (XLR-3)</i>	
Max. input voltage (symmetrical, eff):	14 dBV
Input impedance:	10 kOhm
<i>Analogue input (RCA)</i>	
Max. input voltage (eff):	20 dBV
Input impedance:	10 kOhm
Audio data	
Frequency response:	0.3 Hz to 100 kHz (-3 dB)
Total harmonic distortion:	< 0.001 %
Weight of product:	2.2 kg
Dimension of product (W x H x D):	approx. 224 x 44 x 306 mm

Packaging

Packaging type	Closed carton box, e-flute
Content of Delivery	amplifier, CD with user manual plus driver software for Windows, Quick Guide and Safety Guide
Dimensions of product packaging (W x D x H)	approx. 390 mm x 272 mm x 80 mm
Weight of product and packaging	approx. 2.85 kg
Dimension of Master carton (W x D x H)	approx. 500 x 320 x 280 mm
Weight of Master carton	approx. 10 kg
Units per Master carton	3